


# 热缩膜切角包装机

利用POF双层卷膜，自行制袋，将产品装袋、包裹、切角，最后过热缩炉，形成完美的包装成品。

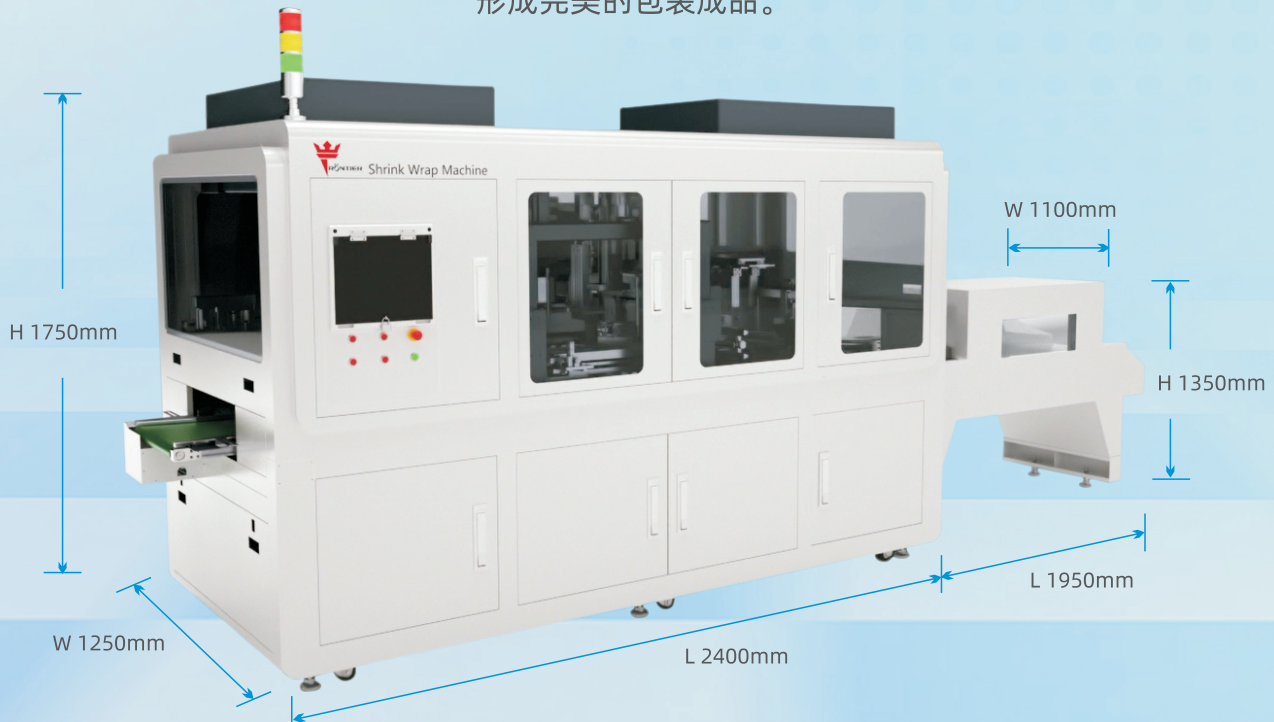

## 功能特点

### 包装效果

- ⊗ 包装精美，无褶皱，无气泡
- ⊗ 结合线平直、稳定、美观

### 操作


- ⊗ 自动上下料
- ⊗ 无人化操作
- ⊗ 废料自动收纳

### 兼容性

- ⊗ 最小40x45x30mm
- ⊗ 最大400x400x150mm
- ⊗ 换线时间≤30分钟

### 定制化

- ⊗ 可根据客户要求定制

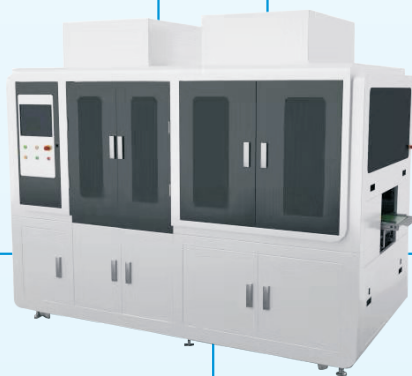

### 可选功能

- ⊗ 称重扫码
- ⊗ 离子风机清洁
- ⊗ 不同尺寸盒子混投
- ⊗ 支持客户生产系统和MES系统

## 适应产品 >>>



电子设备



茶叶




化妆品



包装礼盒

## 工艺流程 >>>

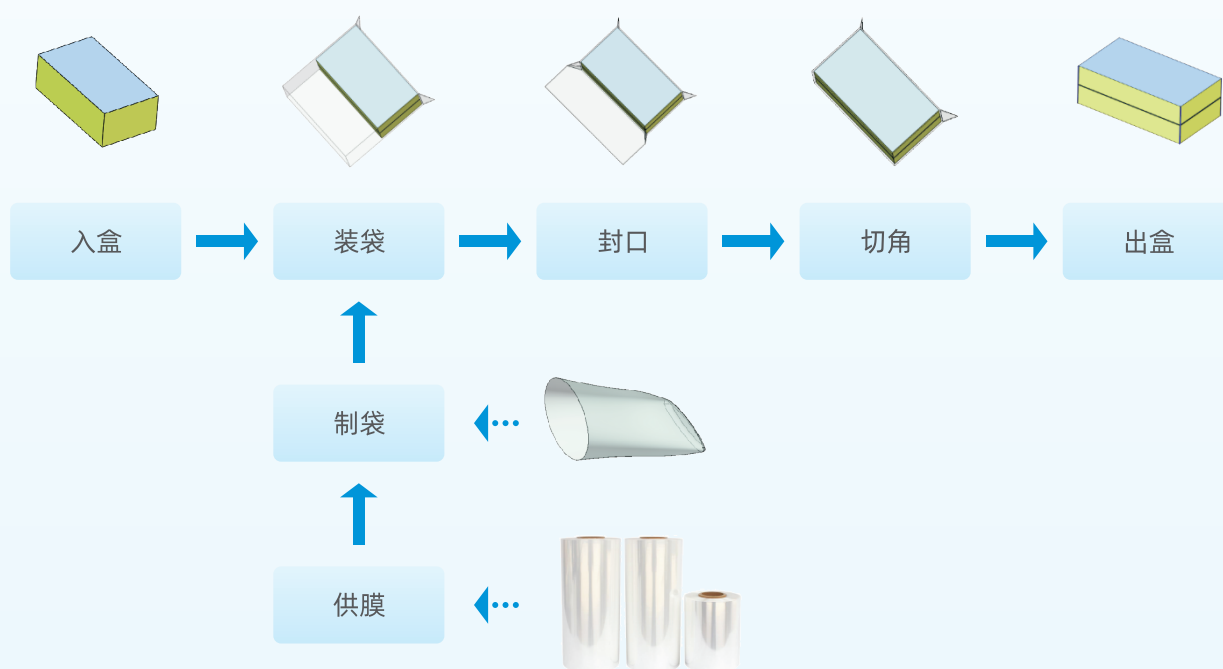


## 设备参数 >>>

最大产品尺寸	400x400x150mm	设备重量	1500KG
最小产品尺寸	40x45x30mm	可选配置	称重扫码、盒高混投、离子风机清洁
产能	> 400pcs/h	良率	≥ 99%
换线时间	≤ 30分钟	DT	≤ 1%
POF膜	双层对折膜/单层膜	功率	10KW
设备尺寸	L2400×W1250×H1750mm	气源	0.4m <sup>3</sup> /min

# Shrink Wrap Machine

Adopted with double-layer POF film, it will automatically make bags, wrap up, cut corners and finally go through the shrink oven to produce a perfect packaged product.

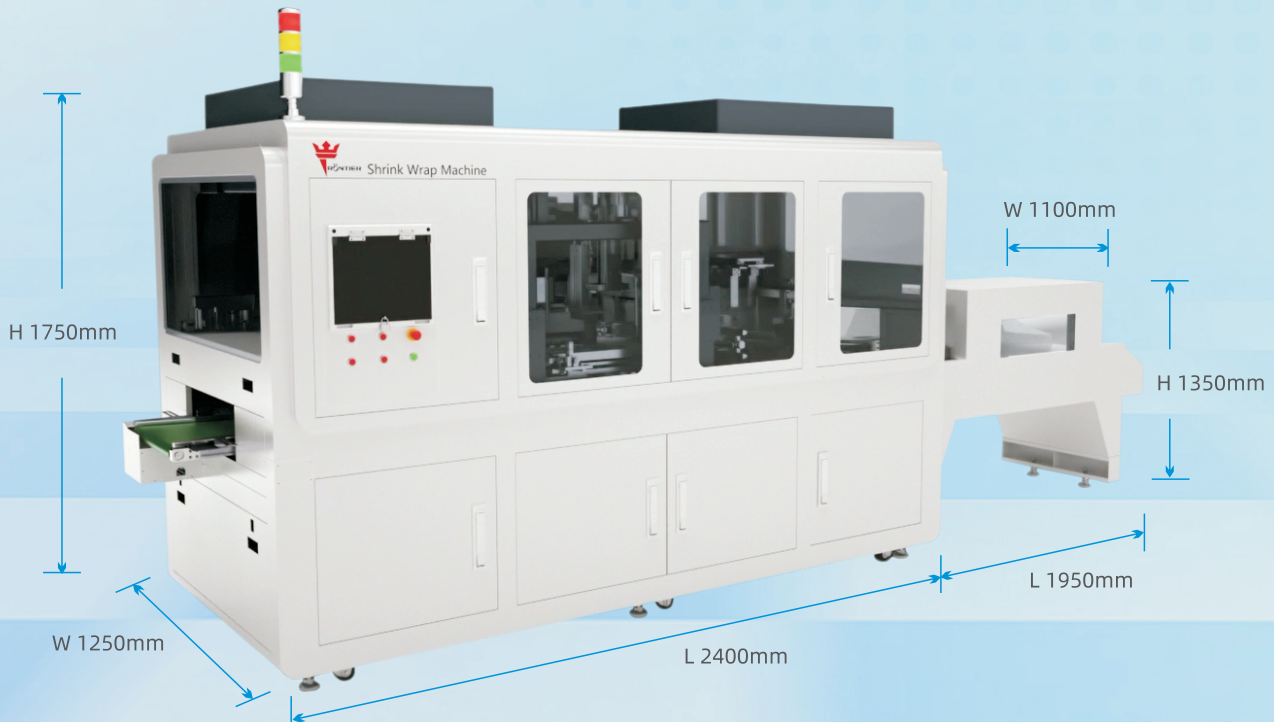

## Features

### Packaging Quality

- ⚙️ Delicately packed, no wrinkles and defects.
- ⚙️ The seam line is straight, stable and beautiful.

### Operation

- ⚙️ Automatic loading and unloading.
- ⚙️ Unmanned operation.
- ⚙️ Automatic waste of storage.

### Compatibility

- ⚙️ Minimum 40x45x30mm.
- ⚙️ Maximum 400x400x150mm.
- ⚙️ Change-over time ≤30minutes.

### Customization

- ⚙️ Customizable according to customer requirements.



### Optional Features

- ⚙️ Weighing sweep code.
- ⚙️ Lon blower cleaning.
- ⚙️ Support mixed input of different box sizes.
- ⚙️ Support customer production system and MES system.

## Applicable Products >>>



Electronic equipment



Tea




Cosmetics



Packing Gift Box

## Process Flow >>>

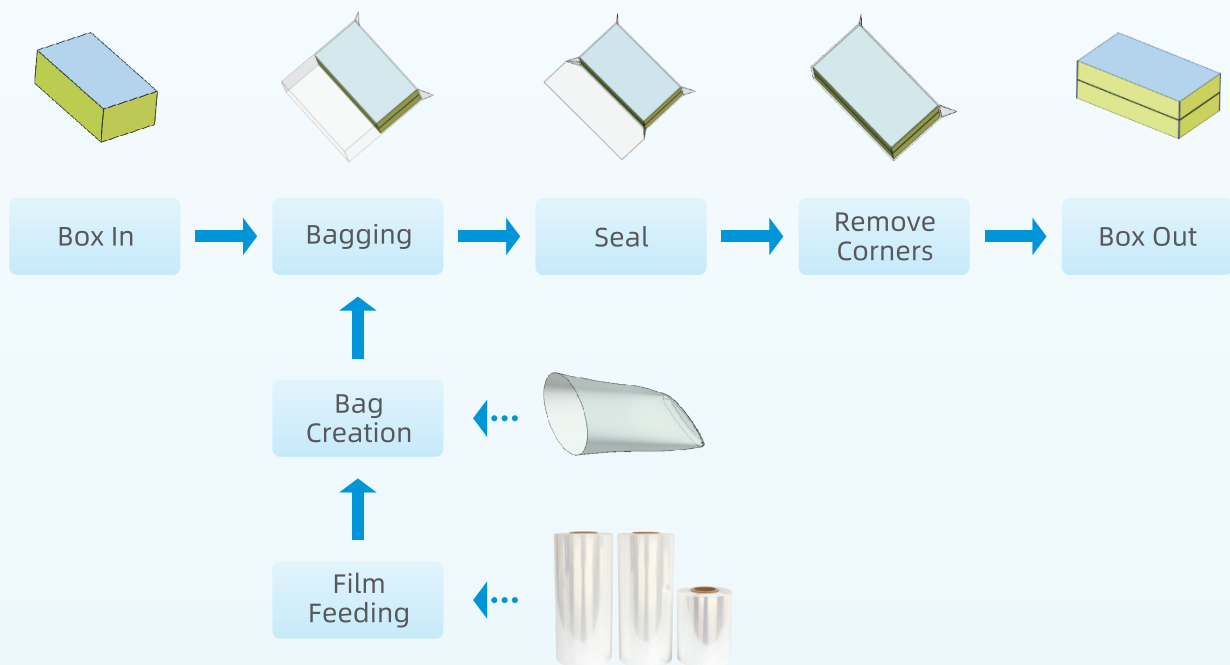

## Equipment Parameters >>>

Maximum Box Size	400x400x150mm	Equipment Weight	1500KG
Minimum Box Size	40x45x30mm	Optional Accessories	Weighing, code scanning, box height mixing, ion fan cleaning.
Capacity	> 400pcs/h	Yield Rate	≥ 99%
Switching Time	≤ 30 minutes	DT	≤ 1%
POF Film	Double-layer folding film Single layer film	Power	10KW
Equipment Size	L2400×W1250×H1750mm	Air Supply	0.4m <sup>3</sup> /min